



DIMENSIONS TABLE

UNIT : mm


NOMINAL SIZE		JIS 10K					t																	
		d	D	C	n	h	D1	D2	l (LIFT)	L	PVC C-PVC	PP PVDF	H	H1	S	S1	S2	S3	S4	S5	S6	S7	S8	P
65mm	2½"	67	175	140	4	19	171	280	34	250	22	23	473	61	85	M8	15	-	-	-	-	-	-	¼
80	3	78	185	150	8	19	195	305	42	280	22	23	550	109	-	-	-	12	180	220	175	215	19	¼
100	4	100	210	175	8	19	235	385	50	340	22	24	601	119	-	-	-	15	230	270	220	260	19	¼

NOTE.


1. Operation of permission pressure: 0.4~0.6MPa G
2. Diaphragms except EPDM and PTFE are available in FKM, VIFLON-C (FKM-C), VIFLON-F (FKM-F), CSM and NBR when required.
3. The shape and appearance of assembly differ a little with nominal size compared to this drawing.

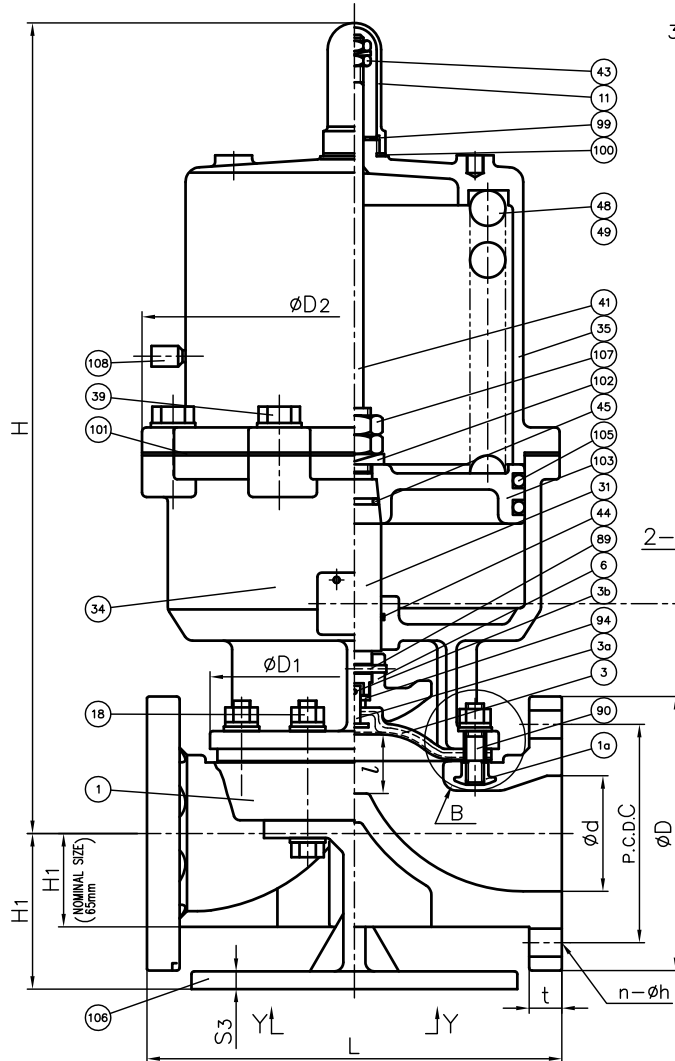


In case material of diaphragm is PTFE.



In case material of diaphragm is PTFE with cushion cover.




In Case of PVDF Body




"B" Part

Y-Y (80,100mm)

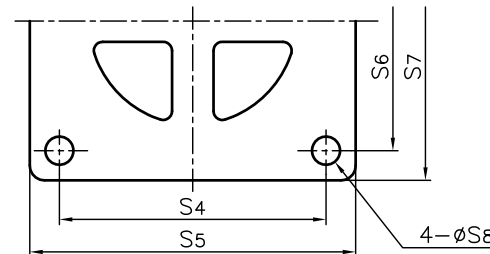

(65mm)



No.	DESCRIPTION	QTY.	MATERIAL	REMARKS
108	CHECK VALVE FOR EXHAUST	1	COPPER ALLOY (C3604)	
107	LOCK NUT	2	Chromized STEEL (SS400)	
106	STAND	1	CAST ALUMINUM ALLOY (ACAC) (Epoxy Coat)	Used for Size 80,100mm
105	O-RING (H)	2	NBR	
103	PISTON	1	CAST ALUMINUM ALLOY (AC5A)	
102	SPRING WASHER (A)	1	SPRING STEEL (SUP)	
101	SHEET GASKET (B)	1	NBR	
100	SHEET GASKET (A)	1	EPDM	
99	VALVE SHEET	1	STAINLESS STEEL (SUS304)	
94	METAL OF COMPRESSOR	1	STAINLESS STEEL (SUS304)	
90	STUD BOLT-NUT	4Sets	STAINLESS STEEL (SUS304)	
89	COMPRESSOR PIN	1	STAINLESS STEEL (SUS304)	
49	SPRING (B)	1	SPRING STEEL (SUP)	Used for Size 100mm
48	SPRING (A)	1	SPRING STEEL (SUP)	
45	O-RING (E)	1	NBR	
44	O-RING (D)	1	NBR	
43	STOPPER (B)	1	STAINLESS STEEL (SUS304)	
41	INDICATING LOD	1	STAINLESS STEEL (SUS304)	
39	BOLT (A)	-	STAINLESS STEEL (SUS304)	
35	CYLINDER BONNET	1	CAST ALUMINUM ALLOY (ACAC)	Epoxy Coat
34	CYLINDER BODY	1	CAST ALUMINUM ALLOY (ACAC)	Epoxy Coat
31	STEM (A)	1	COPPER ALLOY (C3604)	
24	ENSAT FOR BODY	2	STAINLESS STEEL (SUS303)	Used for Size 65mm
19	CONICAL SPRING WASHER (A)	8Sets	STAINLESS STEEL (SUS304)	Used for PVDF Body
18	BOLT-NUT (A)	4Sets	STAINLESS STEEL (SUS304)	
11	GAUGE COVER	1	PC	
6	COMPRESSOR	1	PVDF	
5	CUSHION COVER	1	□Nothing □PVDF	Used for PTFE Diaphragm
4	CUSHION	1	EPDM	
3b	DIAPHRAGM PIN	1	STAINLESS STEEL (SUS304)	
3a	INSERTED METAL OF DIAPHRAGM	1	STAINLESS STEEL (SUS304)	
3	DIAPHRAGM	1	□EPDM □PTFE □Others	
1a	INSERTED NUT	4	COPPER ALLOY (C3604) STAINLESS STEEL (SUS304)	Used for PVC,C-PVC,PP Body Used for PVDF Body
1	BODY	1	□PVC □C-PVC □PP □PVDF	

ITEM	DESCRIPTION	QTY.	MATERIAL	REMARKS
	DIAPHRAGM VALVE (TYPE 14) PNEUMATIC ACTUATED MODEL TYPE AV ASS'Y AIR TO OPEN JIS 10K : FLANGED END 65mm (2½") ~ 100mm (4")			
DRAWN	E.Emmei	DATE	SCALE	
CHECKED	H.Kawano	MAR.1.2023	DRAWING No.	
APPROVED	K.Koushou	D1-AA204JE	DRAWING No.	
SPECIAL ORDER No.	ASAHI YUKIZAI CORPORATION			